

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 December 2001 (06.12.2001)

PCT

(10) International Publication Number  
WO 01/93363 A2

(51) International Patent Classification: H01M 10/40

(81) Designated State (national): JP.

(21) International Application Number: PCT/US01/17174

(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(22) International Filing Date: 25 May 2001 (25.05.2001)

(25) Filing Language:

English

**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

(26) Publication Language:

English

(30) Priority Data:

60/207,613

26 May 2000 (26.05.2000) US

**Published:**

- without international search report and to be republished upon receipt of that report

(71) Applicant: COVALENT ASSOCIATES, INC. [US/US];  
Ten State Street, Woburn, MA 01801 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(72) Inventors: MCEWEN, Alan, B.; 20 Upham Terrace, Melrose, MA 02176 (US); KOCH, Victor, R.; 5 Fridolin Hill, Lincoln, MA 01173 (US).

(74) Agents: HEINE, Holliday, C. et al.; Weingarten, Schurigin, Gagnebin & Hayes, LLP, Ten Post Office Square, Boston, MA 02109 (US).



WO 01/93363 A2

(54) Title: NON-FLAMMABLE ELECTROLYTES

(57) Abstract: Improved electrolytes for application in electrical storage devices, such as batteries and capacitors, electrochromic display and other applications requiring ionically conductive median are disclosed. The electrolytes of the invention contain organic cation salts, also called ionic liquids or molten salts. These improved electrolytes have useful characteristics such as high thermal stability and reduced flammability.

## NON-FLAMMABLE ELECTROLYTES

## 5 CROSS REFERENCE TO RELATED APPLICATIONS

This application claims priority from United States provisional patent application Serial No. 60/207,613 filed May 26, 2000, the whole of which is hereby incorporated by reference herein.

10

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR  
DEVELOPMENT

N/A

## 15 BACKGROUND OF THE INVENTION

The present invention relates to electrolytes useful in electrochemical systems requiring thermal stability and non-flammability.

Over the past 20 years, rapid advances in consumer  
20 electronics have driven concurrent growth in the high energy density rechargeable battery market. In many applications, the battery is the component that limits the performance, size, and weight of the electronic device. The need for improved rechargeable battery  
25 chemistries has resulted in an active research and development effort by the battery industry to provide superior products for a wide range of applications including military/aerospace, consumer electronics, and electric vehicles.

30 Owing to their intrinsically high theoretical gravimetric and volumetric energy densities, rechargeable lithium-ion batteries hold great promise as power sources for the aforementioned applications.

State-of-the-art lithium ion cells deliver almost 4 volts, have volumetric energy densities approaching 305 Wh/liter and possess a long shelf life at ambient temperature. Lithium-ion batteries are also called

5 "rocking chair" batteries because the technology is based on the use of anodes and cathodes comprising lithium intercalation materials. Usually, a lithium transition metal oxide such as  $\text{LiCoO}_2$  or  $\text{LiCo}_x\text{Ni}_{1-x}\text{O}_2$  is used as a positive electrode or cathode and a

10 carbonaceous material such as graphite is used for the negative electrode or anode.

Li-ion batteries have become a widely accepted commercial product today. The majority of the commercial Li-ion batteries are composed of prismatic or spiral

15 wound cells of 1.5 to 2 Ah capacity and are used for powering portable consumer equipment such as cellular telephones and laptop computers.

There is a significant amount of current research and development activity to develop large Li-ion

20 batteries for electric vehicle (EV) propulsion. EV batteries are built in sizes ranging from 20 to 40 KWh, significantly larger than the commercial batteries used in consumer electronics. Consequently, an unknown characteristic of Li-ion EV batteries is the safety

25 hazard rooted in their enormous size. In particular, electrolyte flammability is of concern either due to electrolyte leakage from the battery or the battery being overcharged or abused. Therefore, the development of non-flammable electrolytes is extremely important for

30 the successful fielding of Li-ion batteries for application in consumer electronic products and EV.

Early high energy density rechargeable batteries (and some still being developed today) used metallic

lithium as the anode. The advantages of lithium intercalation-based anodes over metallic lithium, especially in cycle life and safety, far outweigh their disadvantages (see Winter et al. in Adv. Mater. 10, p.775 (1998)). In replacing lithium metal with lithium-carbon anodes there is an obvious specific energy penalty because of the higher weight of the anode and the lower voltage of the battery due to the fact that lithium-carbon intercalation occurs at potentials higher than that of lithium deposition or dissolution on an inert electrode. This has provided motivation to develop high voltage cathodes such as the transition metal oxides of which the classical example is  $\text{LiCoO}_2$ .

The use of 4 volt cathodes, which routinely reach 4.3 - 4.4 V on charge, precludes the use of electrolytes based on ethereal solvents because ethers are oxidized between 3.7 - 4.0 V (vs.  $\text{Li/Li}^+$ ). Ethers are also highly flammable; for example, the flash point of diethyl ether is  $-40^\circ\text{C}$ . Therefore, esters or alkyl carbonate solvents are typically used in Li-ion batteries. Another approach is the use of a solid polymer electrolyte. Polymers, which eliminate the need for volatile and flammable solvents, are considered to have safety advantages over liquid electrolytes. However, polymer electrolytes exhibit lower conductivities which must be compensated for by using thinner electrodes and separators and larger electrode areas, which compromise energy density. Thus, the development of non-flammable liquid electrolytes remains a highly desired goal.

The benchmark anode materials for lithium-ion cells is graphite, which intercalates lithium reversibly up to a stoichiometry of  $\text{LiC}_6$ , leading to a capacity of 372 mAh/gram. Another advantage of this carbon is the low,

flat Li intercalation potential (close to that of  $\text{Li}/\text{Li}^+$ ). Graphite has a major disadvantage, however; in many polar aprotic solvents it is unstable at lithium intercalation potentials.

- 5 According to one school of thought, the main cause of instability of lithium-graphite anodes upon cycling is co-intercalation of solvent molecules along with the Li-ions into the graphite structure. This process, which may be accompanied by the reduction of the solvent, is
- 10 detrimental to graphite stability and destroys its structure causing exfoliation of the graphite followed by physical and electrical disconnection of anode particles from the bulk. Another view is that there is no co-intercalation of solvent and the inability of
- 15 graphite to intercalate Li is caused by the passivation of its surface by the deposition of electrolyte reduction products. Li intercalation is possible when the surface film is thin and has the characteristics of a solid electrolyte interphase (SEI). When graphite is
- 20 immersed in non-aqueous electrolytes and is polarized to low potentials (vs.  $\text{Li}/\text{Li}^+$ ), solution species are reduced at potentials higher than that of the intercalation process and surface films are formed in analogy to the reduction processes at a lithium metal
- 25 electrode. Once these surface films are fully developed and form compact passivating layers, which completely isolate the carbon active mass from the solution before it reaches intercalation potentials, the electrode is stabilized. In this situation, these surface films act
- 30 as SEI or "molecular screens" which allow only Li-ion migration through them while simultaneously excluding solvent molecules. Therefore, using an appropriate electrolyte solution makes it possible to obtain

extended cycle life with graphite electrodes. Since the Li transition metal oxide cathode is the only source of Li in conventional lithium-ion cells, any consumption of Li to produce the solid electrolyte interphase films leads to capacity loss. Thus, the amount of irreversible capacity loss which occurs on the carbon during the first intercalation of lithium must be minimized, and the appropriate electrolyte must be chosen in order to build a compact passivating layer with minimum loss of capacity.

Electrolytes that are nonflammable are needed to ensure the safety of lithium ion batteries. These electrolytes must be capable of being used with high potential lithium intercalation cathodes and anodes consisting of either lithium metal or lithium intercalation material (e.g., graphite). Any electrolytes used with lithium ion batteries should have good cycling characteristics for long battery life.

20

#### BRIEF SUMMARY OF THE INVENTION

The invention is directed improved electrolytes for application in electrical storage devices, such as batteries and capacitors, electrochromic display and other applications requiring ionically conductive medium, that have reduced flammability compared to prior art devices. The electrolytes of the invention include an organic cation salt, sometimes called an ionic liquid (IL) or a molten salt. Batteries that use the electrolytes of the invention have improved performance and safety characteristics. The organic cation salts in the electrolytes of the invention are selected from the group of cyclic stabilized organic cations and

30

quaternary ammonium and phosphonium cations combined with inorganic or organic anions. Gel polymer electrolytes using organic cation salts and batteries using such electrolytes are also described.

5

#### BRIEF DESCRIPTION OF THE DRAWINGS

Other features and advantages of the invention will be apparent from the following detailed description of the invention, taken in conjunction with the  
10 accompanying drawings in which:

Fig. 1 shows the molecular structures of representative organic cations useful in forming the organic cation salts used in this invention;

Fig. 2 shows the molecular structures of  
15 representative anions useful in forming the organic cation salts used in this invention where (I) is bis(trifluoromethylsulfonyl)imide commonly referred to as "Imide or Im," (II) is bis(perfluorethylsulfonyl)imide commonly referred to as "Betl," (III) is  
20 trifluoromethanesulfonate commonly referred to as "Triflate or OTf," (IV) is tris(trifluoromethylsulfonyl)methide, commonly referred to as "Methide or Me," (V) is tetrafluoroborate, (VI) is hexafluorophosphate, and (VII) is hexafluoroarsinate;

25 Fig. 3A shows the molecular structure of 1-ethyl-3-methyl-imidazolium (EMI);

Fig. 3B shows the molecular structure of 1,2-dimethyl-3 ethyl-imidazolium (DMEI);

Fig. 3C shows the molecular structure of 1,2-  
30 dimethyl-3 propyl-imidazolium (DMPI);

Fig. 3D shows the molecular structure of pentamethyl-imidazolium imide (MsIIm);

Fig. 3E shows the molecular structure of tetraethyl ammonium imide (TEAIm or Et<sub>4</sub>NIm);

Fig. 3F shows the molecular structure of 1,2-dimethyl pyrazolium hexafluorophosphate (DMPPF<sub>6</sub>);

5 Fig. 4 shows a plot of the voltage (V) vs. capacity (milliamphere-hour per square centimeter (mAh/cm<sup>2</sup>)) for a graphite electrode using the electrolyte 1M LiPF<sub>6</sub> in EMIIIm:DMC (9:1) and lithium metal as a counter electrode and lithium metal as the reference electrode. The 1<sup>st</sup>,  
10 6<sup>th</sup>, and 10<sup>th</sup> cycles are shown and compared to a standard flammable lithium electrolyte (S);

Fig. 5 shows a plot of the voltage (V) vs. capacity (mAh/cm<sup>2</sup>) for a graphite electrode using the electrolyte 1M LiPF<sub>6</sub> in EMIIIm:EC:DMC (6:1:1) and lithium metal as a  
15 counter electrode and lithium metal as the reference electrode. The 1<sup>st</sup>, 5<sup>th</sup>, and 10<sup>th</sup> cycles are shown and compared to a standard flammable lithium electrolyte (S);

Fig. 6 shows a plot of the capacity (mAh/cm<sup>2</sup>) vs. cycle number (#) for a graphite electrode in two  
20 electrolytes (♦) 1M LiPF<sub>6</sub> in EMIIIm:DMC (9:1) and (O) 1M LiPF<sub>6</sub> in EMIIIm:EC:DMC (6:1:1);

Fig. 7 shows voltage vs. capacity for the first cycle of a graphite/LiCoO<sub>2</sub> lithium ion battery  
25 containing 1M LiPF<sub>6</sub> in EMIIIm:EC:DMC (6:1:1);

Fig. 8 shows the cycling efficiency in percent (%) versus cycle number (#) for a graphite/LiCoO<sub>2</sub> lithium ion battery containing 1M LiPF<sub>6</sub> in EMIIIm:EC:DMC (6:1:1);

Fig. 9 shows the first discharge from a lithium  
30 metal anode and LiCoO<sub>2</sub> cathode battery using the organic salt electrolyte 3M DMEIIm in PC. Discharge voltage (V) vs. time in hours is plotted;



Fig. 10 shows the capacity for the battery of Fig. 9 vs. cycle number;

Fig. 11 shows cycling results (capacity in mAh [charge (▲), discharge (■)] vs. cycle number) for a lithium ion battery (graphite anode and cobalt oxide cathode) comparing organic salt electrolytes: (A) 0.5 M  $\text{LiPF}_6$  and 1.5 M  $\text{M}_5\text{IIm}$  in PC:glyme (1:1 volume ratio); (B) 0.5 M  $\text{LiPF}_6$  and 1.5 M  $\text{M}_5\text{IIm}$  in PC:diglyme (1:1); (C) 0.5 M  $\text{LiPF}_6$  and 1.5 M  $\text{M}_5\text{IIm}$  in PC; (D) 0.5 M  $\text{LiPF}_6$  and 1.5 M  $\text{M}_5\text{IIm}$  in PC:tetraglyme (1:1); and (E) 0.5 M  $\text{LiPF}_6$  and 1.5 M  $\text{M}_5\text{IIm}$  in PC:triglyme (1:1);

Fig. 12 shows cycling results (capacity in mAh [charge (▲), discharge (■)] vs. cycle number) for a lithium ion battery (graphite anode and cobalt oxide cathode) comparing organic salt electrolytes with differing lithium salt: (1) 0.5 M  $\text{LiPF}_6$  and 2.5 M  $\text{M}_5\text{IIm}$  in PC:glyme (1:1); (2) 0.5 M  $\text{LiBetI}$  and 2.5 M  $\text{M}_5\text{IIm}$  in PC:glyme (1:1); (3) 0.5 M  $\text{LiMethide}$  and 2.5 M  $\text{M}_5\text{IIm}$  in PC:glyme (1:1); (4) 0.5 M  $\text{LiImide}$  and 2.5 M  $\text{M}_5\text{IIm}$  in PC:glyme (1:1);

Fig. 13 shows the charge (◆) and discharge (○) capacity (mAh) vs. cycle number (#) for a graphite/ $\text{LiCoO}_2$  battery using 0.5M  $\text{LiPF}_6$  and 1.5M  $\text{M}_5\text{IIm}$  in EC as the electrolyte;

Fig. 14 shows the charge (■) and discharge (○) capacity (mAh) vs. cycle number (#) for a graphite/ $\text{LiCoO}_2$  battery using 0.5M  $\text{LiPF}_6$  and 1.5M TEAIm in EC as the electrolyte;

Fig. 15 shows the charge (■) and discharge (○) capacity (mAh) vs. cycle number (#) for a graphite/ $\text{LiCoO}_2$  battery using 0.5M  $\text{LiPF}_6$  and 1.5M  $\text{M}_5\text{Ime}$  in PC and glyme(1:1 volume ratio) as the electrolyte;

Fig. 16 shows the charge (■) and discharge (○) capacity (mAh) vs. cycle number (#) for a graphite/LiCoO<sub>2</sub> battery using 0.5M LiPF<sub>6</sub> and 1.5M M<sub>5</sub>IBeti in PC and glyme (1:1 volume ratio) as the electrolyte;

5 Fig. 17 shows the voltage (V) vs. time (hrs) for the first five cycles of a graphite/LiCoO<sub>2</sub> battery using 0.5M LiPF<sub>6</sub> and 1.5M 1-heptyl-tetramethyl-imidazolium imide in PC and glyme (1:1 volume ratio) as the electrolyte;

10 Fig. 18 shows a plot of voltage (V) vs. time (hrs) for a Li/Li<sub>x</sub>C coin cell containing a LiPF<sub>6</sub>/M<sub>5</sub>IIm:EC:PC:PVdF electrolyte at 25 °C;

Fig. 19 shows a plot of voltage (V) vs. time (hrs) for a Li/LiCoO<sub>2</sub> coin cell containing a  
15 LiPF<sub>6</sub>/M<sub>5</sub>IIm:EC:PC:PVdF electrolyte at 25 °C (a) and 37 °C (b);

Fig. 20 shows a plot of voltage (V) vs. time (hrs) for a Li<sub>x</sub>C/LiCoO<sub>2</sub> coin cell containing a thermally polymerized LiPF<sub>6</sub>/M<sub>5</sub>IIm:EC:PC:TEGDA:MMA electrolyte at 25  
20 °C;

Fig. 21 shows the charge (■) and discharge (○) capacity (mAh) vs. cycle number (#) for a Li<sub>x</sub>C/LiCoO<sub>2</sub> coin cell containing a LiPF<sub>6</sub>/ M<sub>5</sub>IIm:EC:PC:PVdF electrolyte at a 4.2V cutoff voltage;

25 Fig. 22 shows the charge (■) and discharge (○) capacity (mAh) vs. cycle number (#) for a Li/LiCoO<sub>2</sub> coin cell containing a LiPF<sub>6</sub>/M<sub>5</sub>IIm:EC:PC:PVdF electrolyte at a 4.2 V cutoff voltage (cycles 1-3) and then a 4.6 V cutoff voltage (cycles 4-10);

30 Fig. 23 shows a plot of voltage (V) vs. time (hrs) for a Li<sub>x</sub>C/LiCoO<sub>2</sub> coin cell containing a thermally polymerized 0.65 M LiBetI & 0.75 M Et<sub>4</sub>NIm in

EC:PC:TEGDA:MMA (46:40:8:6 mass ratio) electrolyte at 25 °C;

Fig. 24 shows a TGA plot of mass (percent of total) vs. temperature comparing EC based liquid electrolytes containing (A) neat EC; (B) 0.5M LiPF<sub>6</sub>; (C) 0.5M LiPF<sub>6</sub> & 1.5 M Et<sub>4</sub>NIm; (D) 0.5M LiPF<sub>6</sub> & 1.5 M DMPF<sub>6</sub>; (E) 0.5M LiPF<sub>6</sub> & 1.5 M EMIIm; (F) 0.5M LiPF<sub>6</sub> & 1.5 M M<sub>5</sub>IBeti; and

Fig. 25 shows a TGA plot of mass (percent of total) vs. temperature comparing gel electrolytes (PC:EC:TEGDA:MMA) containing (A) 0.6M LiBet<sub>i</sub> & 0.75 M Et<sub>4</sub>NIm; (B) 0.6M LiBet<sub>i</sub> & 0.75 M M<sub>5</sub>IIm; (C) 0.6M LiPF<sub>6</sub> & 0.75 M Et<sub>4</sub>NIm; (D) 0.6M LiPF<sub>6</sub> & 0.75 M M<sub>5</sub>IIm; (E) 1M LiPF<sub>6</sub>; and (F) 0.6M LiPF<sub>6</sub>.

15

#### DETAILED DESCRIPTION OF THE INVENTION

An electrolyte made according to the invention contains a salt additive comprising organic cations. This organic cation salt additive is sometimes referred to as an ionic liquid or molten salt. In addition to the organic salt, the electrolyte may contain one or more organic solvents and a metal salt appropriately chosen for the operation of e.g., a battery. The electrolyte with the organic salt additive has reduced flammability properties and reduced volatility that is of use in the design of safe batteries. Nonflammable, or reduced flammability, electrolytes are critically important for the next generation of safe power sources used in applications running the gamut from laptop computers to hybrid electric vehicles.

The organic cation salts comprise combinations of either delocalized heterocyclic cations or quaternary ammonium or phosphonium cations combined with anions.

The organic cation has one of the structures depicted in Fig. 1, wherein  $R_1$ ,  $R_2$ ,  $R_3$ ,  $R_4$ ,  $R_5$ , and  $R_6$  are either H; F; separate alkyl groups of from 1 to 15 carbon atoms, respectively; or two of said separate alkyl groups are  
5 joined together to constitute a unitary alkylene radical of from 2 to 6 carbon atoms forming a ring structure converging on N; or separate phenyl group, and wherein the alkyl groups, unitary alkylene radical or phenyl groups are optionally substituted.

10 Various possible anion species may be used in forming the ionic liquid or organic cation salt additives used in the formulating of nonflammable electrolytes that are the object of this invention. Several examples are depicted in Fig. 2.

15 The synthesis of the ionic liquid/ molten salt additives is accomplished via established methods. For example, see U.S. Patent Nos. 5,827,602 and 5,077,414, the reports of Kuhn et al., in *Z. Naturforsch.*, 46B, 1706 (1991), and Bonhote et al., in *Inorg. Chem.*, 35, 20 1168 (1996). Additional examples of the synthesis of quaternary ammonium salts which are useful in practicing the invention disclosed herein, can be found in *Electrochimica Acta*, 45, 1271 (2000).

For battery applications, representative examples  
25 of salts containing a metal cation particularly alkali and alkaline earth metal, cations, are selected from a group consisting of  $Li^+$ ,  $Na^+$ ,  $K^+$ ,  $Ca^{++}$ ,  $Mg^{++}$ , and  $Al^{+++}$ . The anions of these salts can be organic or inorganic. Specific examples of suitable anions include  $I^-$ ,  $Br^-$ ,  
30  $SCN^-$ ,  $BF_4^-$ ,  $PF_6^-$ ,  $AsF_6^-$ ,  $CF_3SO_2^-$ ,  $(CF_3SO_2)_2N^-$ ,  $(CF_3CF_2SO_2)_2N^-$ , and  $(CF_3SO_2)_3C^-$ .

The organic solvent of the present invention is not particularly limited as long as it can solubilize the

organic cation salt(s) and the metal salt(s). Either an individual solvent may be used alone, or a mixed solvent containing a plurality of solvents may be used. Examples of solvents used in the present invention are

5 cyclic and acyclic, saturated or unsaturated organic carbonates such as ethylene carbonate (EC), propylene carbonate (PC), dimethyl carbonate (DMC), diethyl carbonate (DEC), ethyl methyl carbonate (EMC), ethyl propyl carbonate (EPC), propyl methyl carbonates

10 (PMC)), (*n*- and *iso*-), butyl methyl carbonates (BMC *n*-, *sec*-, and *iso*-), and butylene carbonate (BC). Other solvents that may be used are gamma-butyrolactone (GBL), methyl acetate (MA), ethyl acetate (EA), methyl formate (MF), sulfolane, methylsulfolane, diethyl ether, methyl

15 ethyl ether, tetrahydrofuran (THF), 2-methyltetrahydrofuran, 1,3-dioxolane, nitromethane, acetonitrile (AN), dimethylformamide (DMF), dimethylacetamide, dimethylsulfoxide (DMSO) and benzonitrile.

20 In further embodiments, electrolytes made according to the invention may also contain quantities of organic materials such as vinylene carbonate (VC), or alkyl phosphonates, or alkyl nitrites and derivatives. These materials, when added to the electrolyte in amounts

25 ranging from approximately 0.05 to 5 weight percent, have been found to reduce the irreversible capacity on the first cycle of a lithium ion cell.

Various imidazolium cation structures can be used to form the organic cation salt. For example, 1,3

30 alkylation at the two nitrogen atoms with an ethyl and methyl group results in the 1-ethyl-3-methyl imidazolium (EMI) cation (Fig. 3A). Likewise 1,2,3 trialkylation can result in 1,2-dimethyl-3-ethyl imidazolium (DMEI -

Fig. 3B) and 1,2-dimethyl-3-propyl imidazolium (DMPI - Fig. 3C) cation structures. These 1,2,3 trialkylated imidazolium structures have removed the slightly acidic hydrogen at the C(2) position and have increased reductive stability compared to the 1,3 dialkylated imidazolium cations. For lithium ion batteries we have found that we can get good cycling using these 1,3 dialkylated and 1,2,3 trialkylated imidazolium salts if we first form the SEI on the carbon negative electrode before introducing these organic cation containing electrolytes.

Improved cycling behavior is realized using the peralkylated imidazolium cation in combination with various anions to form the nonflammable electrolytes. An example of such a salt is the pentamethyl imidazolium organic cation shown in Fig. 3D as the bis(trifluoromethylsulfonyl) imide salt. By using an electrolyte made of 0.5 M lithium  $\text{PF}_6$  and 1.5 M pentamethyl imidazolium imide in ethylene carbonate, we can get excellent *in situ* SEI formation and cycling. We also get similar good performance using tetraethyl ammonium (TEA) imide (Fig. 3E) or 1,2-dimethyl pyrazolium  $\text{PF}_6$  (Fig. 3F) as the organic cation salt in this formulation.

**Table 1:** Flash point data comparing carbonate solvents, typical lithium electrolytes, and organic cation based electrolytes.

5

Solvent	Flash Point (°C)	Electrolyte	Flash Point (°C)
DMC	18	EMIIm	> 180
DEC	31	DMEIBETI	> 180
MPC	36	0.5 M LiAsF <sub>6</sub> /EMIIm	> 180
EMC	< 25	0.5 M LiIm/EMIIm	> 180
i-PMC	< 25	1.0 M LiPF <sub>6</sub> /EMIIm	> 180
MOEMC	79	0.5 M LiPF <sub>6</sub> /EMIIm	> 180
EC	150	0.5 M LiPF <sub>6</sub> /EMIIm & Li <sub>2</sub> CO <sub>3</sub>	> 180
PC	123	0.5M LiPF <sub>6</sub> /DMC	<23
TCEMC	112	1M LiPF <sub>6</sub> /DMC	<23
TFEMC	36	1.0 M LiPF <sub>6</sub> /EMIIm:DMC (3:1) volume ratio	55

**Solvents:** dimethyl carbonate (DMC), diethyl carbonate (DEC), methyl propyl carbonate (MPC), ethyl methyl carbonate (EMC), iso-propyl methyl carbonate (i-PMC), methoxyethyl methyl carbonate (MOEMC), ethylene carbonate (EC), propylene carbonate (PC), trichloroethyl methyl carbonate (TCEMC), trifluoroethyl methyl carbonate (TFEMC).

10

The nonflammable electrolytes that are the  
 15 object of this invention can be made into gelled electrolytes with the appropriate addition of additives to provide the desired gel properties. The addition of binders, such as PVDF, or cross-linking materials can transform the nonflammable liquid electrolytes into gel  
 20 polymer electrolytes (GPE). We have found that we can use thermal and photo-initiated cross-linking to obtain

free standing nonflammable GPEs that have use in electrochemical cells. These gel polymer electrolytes are more desirable for power source applications than are liquid electrolytes, as the gel polymer electrolytes  
5 of the invention offer a number of significant competitive advantages over their liquid electrolyte counterparts:

- Mechanical flexibility, enabling novel power source geometries and form factors
- 10 - Simplification of power source components leading to less expensive, more robust devices
- Higher gravimetric and volumetric energy densities due to the use of light weight packaging materials
- 15 - Improved safety, since no free-flowing organic solvents are present.

In addition to providing conductivities similar to those provided by liquid electrolytes, the gel polymer  
20 electrolytes (GPE) described in this invention embody all of the advantages noted above and also incorporate the highly desirable feature of nonflammability.

For battery applications, the non-flammable GPEs of the present invention contain at least the following:  
25 one organic cation salt or ionic liquid material, a salt containing a metal cation, an organic solvent, and either an acrylate polymer (as a result of thermochemical or photochemical polymerization) or one or more fluoropolymers such as poly(vinylidene)fluoride.  
30 For electrochemical capacitor applications, the salt containing a metal cation is omitted. In all cases, however, electrolyte non-flammability is conferred on the GPEs by the presence of ionic liquid materials.



In the case of a GPE comprising an acrylate polymer, the acrylate polymer used in this invention is made of methylmethacrylate or a variation thereof with at least one monomer copolymerizable to the  
5 methylmethacrylate. In the present invention, the methylmethacrylate polymer is not limited to one kind, but may also be used in combination of two or more kinds of acrylate-based polymers.

The copolymerizable monomer is not limited to  
10 specific kinds as long as the resulting acrylate polymer does not phase separate from the ionic liquid material. Examples of copolymerizable monomers are styrene-containing monomers such as styrene itself, divinyl benzene, cyano-group-containing monomers such as  
15 methacrylonitrile, unsaturated carboxylic acids such as acrylic acid and their salts such as sodium acrylate, acid anhydrides such as maleic anhydride, esters such as methyl methacrylate, ethyl acrylate, propyl acrylate, tetra(ethylene glycol) diacrylate, hydroxyethyl  
20 methacrylate, vinyl halides such as vinyl chloride, vinyl fluoride, and vinyl bromide, vinylidene halide monomers such as vinylidene chloride, vinylidene fluoride, and vinylidene bromide, vinyl esters such as vinyl formate, vinyl acetate, vinyl group-containing  
25 acids compounds or their salts, anhydrides or derivatives, such as p-styrenesulfonic acid, methallylsulfonic acid, vinyl ethers such as methyl vinyl ether, dienes such as butadiene, isoprene and chloroprene.

30 In the case of a GPE comprising a poly(vinylidene)fluoride (PVdF), the present invention is not limited to a single fluoropolymer, but may also be used in combination of two or more kinds of

fluoropolymers such as polyhexafluoropropylenes, polyperfluoroalkoxytrifluoroethylenes, polyvinylfluorides, polytetrafluoroethylenes, and mixtures thereof.

- 5       The organic solvent of the present invention is not particularly limited as long as it can solubilize the ionic liquid material(s), the monomer(s), and the metal salt(s). Either a solvent may be used alone or a mixed solvent containing a plurality of solvents may be used.
- 10       Examples of solvents used in the present invention are cyclic and acyclic, saturated or unsaturated organic carbonates such as ethylene carbonate (EC), propylene carbonate (PC), dimethyl carbonate (DMC), diethyl carbonate (DEC), ethyl methyl carbonate (EMC), ethyl
- 15       propyl carbonate (EPC), propyl methyl carbonates (PMC) (*n*- and *iso*-), butyl methyl carbonates (BMC) (*n*-, *sec*-, and *iso*-), butylene carbonate (BC), and vinylidene carbonate (VC). Other solvents that may be used are gamma-butyrolactone (GBL), methyl acetate (MA), ethyl
- 20       acetate (EA), methyl formate (MF), sulfolane, methylsulfolane, diethyl ether, methyl ethyl ether, tetrahydrofuran (THF), 2-methyltetrahydrofuran, 1,3-dioxolane, nitromethane, acetonitrile (AN), dimethylformamide (DMF), dimethylacetamide,
- 25       dimethylsulfoxide (DMSO), and benzonitrile.

- In a further embodiment, the GPE may also contain quantities of inorganic materials such as alumina ( $\text{Al}_2\text{O}_3$ ) or silica ( $\text{SiO}_2$ ). Finely divided alumina or silica particles, when added to the GPE in amounts ranging from
- 30       approximately 0.5 to 5 % by weight, have been found to improve the mechanical properties of the GPE and also serve to scavenge residual protic impurities such as water.

Three general methods regarding the production of non-flammable GPEs for lithium battery applications are as follows:

• A thermal gelation technique where the ionic liquid, a lithium salt, and a fluoropolymer such as PVdF [poly(vinylidene fluoride)] are heated together at approximately 100°C to yield a homogeneous melt that, when cast onto a Teflon or glass plate and cooled, forms a mechanically robust GPE.

• A light initiated polymerization technique where a solution of the ionic liquid, a lithium salt, acrylate monomers such as tetra(ethylene glycol) diacrylate (TEGDA), methyl methacrylate (MMA), and small quantities of either 2,2'-azobisisobutyronitrile (ABIN) or benzoyl peroxide (BP) used as a photoinitiator are irradiated under UV light to form a mechanically robust GPE.

• A thermally initiated polymerization technique where a solution of the ionic liquid, a lithium salt, acrylate monomers such as TEGDA, MMA, and ABIN or BP are heated to approximately 60°C to form a mechanically robust GPE.

The same three methods for the production of non-flammable GPEs for electrochemical capacitor applications are as above with the lithium salt omitted from the electrolyte formulation.

All of the GPEs were prepared in a dry, Ar-filled glove box in order to preclude exposure to water vapor. GPEs comprising organic solvents and prepared by the hot melt technique, UV initiated polymerization, or

thermally initiated polymerization provided freestanding films with no evidence of phase separation between liquid and solid components.

For battery applications, GPEs that provided the  
5 best cycling results comprised quantities of a saturated or unsaturated cyclic or acyclic organic carbonate or lactone. Most of the GPEs comprised ethylene carbonate (EC) and propylene carbonate (PC), or from 2 to 3 volume percent of vinylidene carbonate used as an additive.  
10 Combinations of EC and gamma-butyrolactone (GBL) afforded results similar to the EC/PC solvent blends.

For convenience, the following organic cation abbreviations are used: "EMI" represents the 1-ethyl-3-methylimidazolium cation, "M<sub>5</sub>I" represents the  
15 pentamethylimidazolium cation, "M<sub>5</sub>P" represents the pentamethylpyrazinium cation, "DMP" represents the 1,2-dimethylpyrazolium cation, "BI" represents the *n*-butylpyridinium cation, and "Et<sub>4</sub>N" or "TEA" represents the tetraethylammonium cation.

20 The GPEs of this invention were evaluated by the methods described below.

#### Flammability Test

Electrolyte flammability was determined by exposing  
25 the GPE directly to the flame of a butane torch after which the torch was removed. A flammable GPE is defined as one that was consumed by flame once ignited. A non-flammable GPE is defined as one that either failed to ignite, or self-extinguished upon removal of the torch.

30 Table 2 presents electrolyte formulations, ionic conductivities, and the flammability of a number of GPEs with and without ionic liquid materials. As can be seen, prior art electrolytes without organic cation

salts are flammable. However, electrolytes according to the invention including organic cation salts are non-flammable.

**Table 2:** Properties of various gel polymer electrolytes with and without ionic liquid materials.

Gel Polymer Electrolyte	Conductivity mS/cm, 25 °C	Flammability
0.65M LiPF <sub>6</sub> & 0.75M BIIIm in EC:PC:TEGDA:MMA (46:40:8:6 mass ratio)	5.2	Non-flammable
0.65M LiPF <sub>6</sub> & 0.75M DMPPF <sub>6</sub> in EC:PC:TEGDA:MMA (46:40:8:6 mass ratio)	6.1	Non-flammable
0.65M LiPF <sub>6</sub> & 0.75M M <sub>3</sub> I <sub>2</sub> Beti in EC:PC:TEGDA:MMA (46:40:8:6 mass ratio)	6.6	Non-flammable
0.65M LiPF <sub>6</sub> & 0.75M Et <sub>4</sub> NIm in EC:PC:TEGDA:MMA (46:40:8:6 mass ratio)	2.9	Non-flammable
0.65M LiPF <sub>6</sub> & 0.75M M <sub>3</sub> PIIm in EC:PC:TEGDA:MMA (46:40:8:6 mass ratio)	2.4	Non-flammable
0.65M LiBeti & 0.75M M <sub>3</sub> IIm in EC:PC:TEGDA:MMA (46:40:8:6 mass ratio)	4.2	Non-flammable
0.65M LiPF <sub>6</sub> & 0.75M EMIIm in PVdF EC:PC:PVdF (41:37:22 mass ratio)	4.0	Non-flammable
0.65M LiPF <sub>6</sub> & 0.75M M <sub>3</sub> IIm in EC:PC:PVdF (41:37:22 mass ratio)	5.1	Non-flammable
0.65M LiPF <sub>6</sub> & 0.75M M <sub>3</sub> IIm in EC:PC:PVdF:silica (41:37:20:2 mass ratio)	4.1	Non-flammable
0.65M LiPF <sub>6</sub> & 0.75M M <sub>3</sub> IIm in EC:GBL:PVdF (41:37:22 mass ratio)	4.8	Non-flammable
0.65M LiPF <sub>6</sub> & 0.75M Et <sub>4</sub> NIm in EC:PC:PVdF (41:37:22 mass ratio)	5.4	Non-flammable
0.65M LiPF <sub>6</sub> & 0.75M M <sub>3</sub> IIm in EC:PC:TEGDA (46:40:14 mass ratio)	4.2	Non-flammable
0.65M LiPF <sub>6</sub> & 0.75M M <sub>3</sub> IIm in EC:PC:TEGDA:MMA (46:40:8:6 mass ratio)	5.5	Non-flammable
0.65M LiPF <sub>6</sub> in EC:PC:PVdF (41:37:22 mass ratio)	4.5	Flammable
0.65M LiPF <sub>6</sub> in EC:PC:TEGDA:MMA (46:40:8:6 mass ratio)	4.1	Flammable

### Ionic Conductivity

GPE disks having a diameter of 1 cm and a uniform thickness of from 200 to 500  $\mu\text{m}$  were cut from a sheet of GPE material and subsequently positioned between stainless steel blocking electrodes with diameters of 1 cm. Ionic conductivities were measured at 25 °C in units of mS/cm by Electrochemical Impedance Spectroscopy in a dry Ar-filled glove box.

As can be seen from the data in Table 1, the measured non-flammable GPE ionic conductivities of from 3-7 mS/cm are adequate for practical discharge rates in a Li-ion battery and are similar to those values for liquid electrolytes.

All GPEs containing EMII<sub>m</sub>, BII<sub>m</sub>, DMPPE<sub>6</sub>, M<sub>5</sub>IBeti, M<sub>5</sub>PI<sub>m</sub>, M<sub>5</sub>II<sub>m</sub>, and Et<sub>4</sub>NI<sub>m</sub> are non-flammable while the GPEs without an ionic liquid material ignited and rapidly burned. This behavior indicates that ionic liquid materials act as effective fire inhibitors/retardants, even when electrolytes comprising the ionic liquid materials are formulated with up to 40 volume percent of highly flammable organic solvents such as PC, EC, and gamma-butyrolactone.

### Electrochemical Cycling Experiments

Three different room temperature galvanostatic (constant current) cycling experiments with the non-flammable GPEs were undertaken.

- Li/Li<sub>x</sub>C half-cells cycled between 1.5 and 0V vs. Li/Li<sup>+</sup>
- Li/LiCoO<sub>2</sub> full cells cycled between 3.0 and 4.3V vs. Li/Li<sup>+</sup>

- $\text{Li}_x\text{C}/\text{LiCoO}_2$  Li-ion cells cycled between 3.0 to 4.2V, and between 3.0 to 4.6V vs.  $\text{Li}/\text{Li}^+$

All cycling experiments employed crimped 2325 coin cells incorporating 1.5 cm diameter GPE disks to assure reproducible results from one type of experiment to another. The cells were assembled in a dry, Ar-filled glove box. The cell anodes were either Li foil disks or commercially available graphite powder on a Cu foil current collector. The cell cathode was  $\text{LiCoO}_2$  on an Al foil current collector. Each cycling experiment had a specific purpose: the first, to assess the ability of the GPE to cycle on graphite in a  $\text{Li}/\text{Li}_x\text{C}$  half-cell; the second, to assess the ability of the GPE to cycle in a Li metal full cell; and the third, to assess the ability of the GPE to cycle in a Li-ion cell.

Surprisingly, we found that GPEs containing the peralkylated heterocyclic cations such as the  $\text{M}_5\text{I}$  or  $\text{M}_5\text{P}$  cation performed significantly better in cycling experiments, compared to those containing the partially alkylated  $\text{EMI}$ , or  $\text{BI}$ , or  $\text{DMP}$  cations. This may involve the acidic [reactive] nature of certain protons found on the heterocyclic ring systems. Such reactive protons are readily eliminated by replacing the proton(s) with another functional group(s), an alkyl group being one such example.

In addition, we found that ionic liquid-based GPEs comprising an organic solvent could be made to cycle at the graphite anode as shown in Fig. 4.

The following examples are presented to illustrate the advantages of the present invention and to assist one of ordinary skill in making and using the same. These



examples are not intended in any way otherwise to limit the scope of the disclosure.

Cycling data examples: 2325 coin cells were assembled utilizing  $\text{LiCoO}_2$  cathode positive electrodes  
5 obtained from working Sony lithium ion batteries and graphite anode negative electrodes. The anodes were made according to the following procedure. In a small container, 0.1 grams of PVDF (KYNAR 761-A) and 0.9 grams of Graphite LVG 2288 (SFG 44) are mixed together. To  
10 this mixture, NMP is added dropwise to the container until a slurry is formed. The slurry is cast onto a very thin sheet of copper. The sheet is dried in a vacuum oven at 135 °C for 45 minutes. The vacuum is turned on for 2 hours or more to remove the NMP. The  
15 sheet is allowed to cool, and then rolled until the graphite is shiny. The graphite is cut into the proper shape and size, heated overnight at 100 °C to remove last traces of water. Cycling data were typically obtained on a Maccor cycler using a 0.35 mA current  
20 between 3.0 and 4.3 volts.

#### EXAMPLE 1

A lithium/graphite half cell was assembled using a graphite electrode that had a preformed SEI. The SEI  
25 was formed on the carbon electrode by cycling the graphite for 5 cycles in a 1 M  $\text{LiPF}_6$  EC:DMC (1:3) electrolyte. The nonflammable organic salt electrolyte is then swapped for the SEI forming electrolyte. Good intercalation and deintercalation of lithium into the  
30 graphite was observed (Fig. 4 and Fig. 5). One can clearly see the three stages of lithium intercalation into the graphite. The cycling dependence of capacity for these two electrolytes is presented in Fig. 6.

Comparison to a standard flammable carbonate electrolyte is made.

#### EXAMPLE 2

5       Organic salt electrolytes can be used in lithium ion batteries. A Graphite anode (negative electrode) and  $\text{LiCoO}_2$  cathode (positive electrode) battery was assembled using graphite with a preformed SEI as described in Example 1. Good charge and discharge  
10 characteristics (Fig. 7) and cycling efficiency is observed (Fig. 8). A capacity of 350 mAh/g of graphite is possible.

#### Example 3

15       A lithium metal anode and lithiated cobalt oxide cathode battery was assembled with 3M 1,2-dimethyl-3-ethyl imidazolium imide (DMEIIm) in PC as the electrolyte. Surprisingly this battery with no lithium metal salt in the electrolyte showed good discharge  
20 characteristics (Fig. 9) and cycling characteristics (Fig. 10).

#### Example 4

Five lithium ion coin cell batteries were assembled using graphite anode electrodes and  $\text{LiCoO}_2$  cathode  
25 electrodes and organic salt electrolytes containing glyme, diglyme, triglyme, tetraglyme, or no glyme additive. The batteries containing the glyme and diglyme additives had improved cycling performance (Fig. 11). These organic salt electrolytes form stable SEIs on  
30 graphite.

#### Example 5

Lithium ion batteries were assembled according to example 4 using organic salt electrolytes containing



## Example 10

An electrolyte using 1-heptyl-tetramethyl-imidazolium imide ( $M_4C7IIm$ ) as the organic cation salt shows good cycling behavior (Fig. 17) in a graphite/ $LiCoO_2$  lithium ion battery. The battery was constructed and tested as previously described (example 4) using an electrolyte comprising 0.5 M  $LiPF_6$  and 1.5 M  $M_4C7IIm$  in PC and glyme (1:1 volume ratio).

10

## Example 11

A clear, colorless solution containing 3.2g of EC, 2.8g PC, and 2.2g of  $BIIm$  was prepared at room temperature. TEGDA monomer (0.6g) and MMA monomer (0.4g) were added such that the resulting solution was approximately 10 volume percent in monomer. Sufficient  $LiPF_6$  was dissolved in the solution to bring the  $Li^+$  concentration to 0.65M. Finally, a small amount (approximately 0.05M) of a free-radical initiator (either AIBN or BP) was dissolved into the electrolyte. The final composition of the electrolyte was 0.75M  $BIIm$  + 0.65M  $LiPF_6$ /EC:PC:TEGDA:MMA (46:40:8:6 weight percent).

The electrolyte was transferred to a glass or Teflon surface with equipped with either a 200  $\mu m$  or a 500  $\mu m$  spacer. The support was covered with either a glass or Teflon sheet and transferred to a 60 °C oven for 30 min. The GPE was then allowed to cure at room temperature for up to 18 hours before subsequent evaluation, the results of which are shown in Table 2.

30

## Example 12

A GPE was produced in the same manner described in Example 11, except that DMPPE<sub>6</sub> was used as the ionic liquid material instead of BIIIm. The evaluation results of this GPE are shown in Table 2.

5

#### Example 13

A GPE was produced in the same manner described in Example 11, except that M<sub>5</sub>IBeti was used as the ionic liquid material instead of BIIIm. The evaluation results of this GPE are shown in Table 2.

10

#### Example 14

A GPE was produced in the same manner described in Example 11, except that Et<sub>4</sub>NIm was used as the ionic liquid material instead of BIIIm. The evaluation results of this GPE are shown in Table 2.

15

#### Example 15

A GPE was produced in the same manner described in Example 11, except that M<sub>5</sub>PIIm was used as the ionic liquid material instead of BIIIm. The evaluation results of this GPE are shown in Table 2.

20

25

#### Example 16

A GPE was produced in the same manner described in Example 11, except that M<sub>5</sub>IIIm was used as the ionic liquid material instead of BIIIm. The evaluation results of this GPE are shown in Table 2.

30

#### Example 17

A GPE was produced in the same manner described in Example 16, except that LiBet1 was used as the lithium salt instead of LiPF<sub>6</sub>. The evaluation results of this GPE are shown in Table 2.

5

#### Example 18

A GPE was produced in the same manner described in Example 11, except that no ionic liquid material was used in the electrolyte formulation. The evaluation results of this GPE are shown in Table 2.

10

#### Example 19

A GPE was produced in the same manner described in Example 11, except that no MMA copolymer was used in the electrolyte formulation. The evaluation results of this GPE are shown in Table 2.

15

#### Example 20

A GPE was produced in the same manner described in Example 19, except that the electrolyte was subjected to a UV radiation source at room temperature (American Ultraviolet Co.) for 10 min rather than heating the electrolyte in an oven. The evaluation results of this GPE are identical to those for Example 19.

20

25

#### Example 21

A clear, colorless solution containing 3.0g of EC, 2.7g of PC, and 2.1g of M<sub>2</sub>IIm was prepared at room temperature. Sufficient LiPF<sub>6</sub> was dissolved in the solution to bring the Li<sup>+</sup> concentration to 0.65M. PVdF (1.6g of either Kynar 2801 or 2822) was added with stirring such that the resulting slurry was 22 weight percent in fluorocarbon. The final composition of the

30

electrolyte was 0.75M  $M_5IIm$  + 0.65M  $LiPF_6/EC:PC:PVdF$  (41:37:22 weight percent).

5 The slurry was transferred to a glass or Teflon surface with equipped with either a 200  $\mu m$  or a 500  $\mu m$  spacer. The support was covered with either a glass or Teflon sheet and transferred to an oven at a temperature of from 100 to 115° C for 10 min. The GPE was then allowed to cool to room temperature before subsequent evaluation, the results of which are shown in Table 2.

10

#### Example 22

A GPE was produced in the same manner described in Example 21, except that 2 weight percent fumed silica dioxide (Degussa Aerosil® 200) was added to the electrolyte formulation. The evaluation results of this GPE are shown in Table 2.

15

#### Example 23

A GPE was produced in the same manner described in Example 21, except that GBL solvent was used in place of PC in the electrolyte formulation. The evaluation results of this GPE are shown in Table 2.

20

#### Example 24

A GPE was produced in the same manner described in Example 11, except that  $Et_4NIm$  was used as the organic cation salt in the electrolyte formulation. The evaluation results of this GPE are shown in Table 2.

25

#### Example 25

A GPE was produced in the same manner described in Example 21, except that, according to prior art

30

technology no organic cation salt material was used in the electrolyte formulation. The evaluation results of this GPE are shown in Table 2. As can be seen, a GPE with no organic cation salt is flammable.

5

## Example 26

Li-intercalation voltage profiles and cycling capacities achieved with either the  
10  $\text{LiPF}_6/\text{M}_5\text{IIm:EC:PC:PvDf}$  hot melt electrolyte or the  $\text{LiPF}_6/\text{M}_5\text{IIm:EC:PC:TEG-DA}$  thermally polymerized electrolyte are similar in providing close to the theoretical  $\text{Li}^+$  intercalation capacity of graphite (Fig. 18).

15 Fig. 19 shows the voltage profile of a  $\text{LiPF}_6/\text{M}_5\text{IIm:EC:PC:PvDf}$  electrolyte in a  $\text{Li}/\text{LiCoO}_2$  coin cell to a cutoff voltage of 4.3 V at two different temperatures, i.e., at 25°C [Fig. 19a] and at 37 °C (Fig.19b). In both cases the charge and discharge curves  
20 are well behaved and we achieved a  $\text{LiCoO}_2$  cathode capacity close to the theoretical value at the 4.3V cutoff potential.

25

## Example 27

Several Li-ion coin cells cycling studies comprising either a thermally polymerized  $\text{LiPF}_6/\text{M}_5\text{IIm:EC:PC:TEG-DA}$  electrolyte or a  $\text{LiPF}_6/\text{M}_5\text{IIm:EC:PC:PvDf}$  electrolyte sandwiched between a  
30  $\text{Li}_x\text{C}$  graphite anode and a  $\text{LiCoO}_2$  cathode were conducted. The room temperature voltage profile is shown in Fig. 20 where good charge/discharge behavior was observed.



## Example 28

Fig. 21 plots capacity against cycle life for a Li-ion coin cell containing a  $\text{LiPF}_6/\text{M}_5\text{IIm:EC:PC:PvDf}$  GPE to a 4.2V cutoff potential at room temperature.

5

## Example 29


The ability to cycle GPEs to high voltage cutoff potentials in Li-ion coin cells was also evaluated. By raising the cell cutoff voltage on charge, the greater the energy that can be extracted from the cell. Fig. 22 shows a plot of capacity versus cycle life at two different cutoff potentials: 4.2 V vs.  $\text{Li}/\text{Li}^+$ , which is the industry standard, and 4.6 V vs.  $\text{Li}/\text{Li}^+$  for a  $\text{Li}_x\text{C}/\text{LiCoO}_2$  coin cell containing  $\text{LiPF}_6/\text{M}_5\text{IIm:EC:PC:PvDf}$ . After the first three cycles to the 4.2 V cutoff the potential was raised to 4.6 V. At the tenth cycle an additional 25% in cell capacity was obtained.

20     The GPE electrolyte of example 24 was used to assemble a  $\text{Li}_x\text{C}/\text{LiCoO}_2$  battery. The cycling data is shown in Fig. 23.

## Example 31

25     The following organic cation salts have been found not to perform well in lithium ion coin cells (assembled as in Example 4) due to poor cycling. These are part of the group of organic cation salts that need to have a preformed SEI prepared first on the carbon anode (as in Example 1) or to have additives to make the SEI.

30



## Example 32

- 5 The flammability of the liquid electrolytes was determined by immersing a fiberglass wick (from fiberglass cloth insulation) in the sample electrolyte and then suspending this doused wick on a wire gauze. One end of the wick is engulfed in flames from a butane
- 10 torch. The torch is removed and the time it takes the flame to propagate 10 cm is measured. As shown in Table 3 the addition of organic cation salts decreases the flammability of the electrolytes.

15 **Table 3.** Burn rate of solvents, typical electrolytes, and electrolytes of this invention.

Sample	Burn rate (mm/min)
Acetone	6250
PC:EC (1:1 volume ratio)	85
EMIImide	Does not burn
M <sub>5</sub> IImide	Does not burn
M <sub>5</sub> IImide(67%)/PC:EC(1:1) (38%)	Does not burn
0.5 M LiPF <sub>6</sub> /PC:EC (1:1)	150
0.5 M LiPF <sub>6</sub> /EMIImide	Does not burn
0.5 M LiPF <sub>6</sub> /M <sub>5</sub> IImide(50%), PC:EC (1:1) (50%)	120
0.5M LiPF <sub>6</sub> & 1.5M M <sub>5</sub> IBeti/EC	Does not burn
0.6M LiPF <sub>6</sub> & 0.75M M <sub>5</sub> IBeti/PC:EC (1:1)	Does not burn

20

## Example 33

The decrease in volatility for the organic cation salt containing liquid electrolytes, compared to a standard electrolyte (0.5 M LiPF<sub>6</sub>/EC) can be observed in

the Thermal Gravimetric Analysis (TGA) results depicted in Fig. 24. The shift to higher temperatures for the observed weight loss is an indication of the decreased volatility for the organic cation salt containing electrolytes.

#### Example 34

10       The decrease in volatility for the organic cation salt containing gel polymer electrolytes, compared to a GPE not containing these organic cation salts can be observed in the Thermal Gravimetric Analysis (TGA) results depicted in Fig. 25. The shift to higher  
15       temperatures for the observed weight loss is an indication of the decreased volatility for the organic cation salt containing electrolytes.

20

While the present invention has been described in  
25       conjunction with a preferred embodiment, one of ordinary skill, after reading the foregoing specification, will be able to effect various changes, substitutions of equivalents, and other alterations to the compositions and methods set forth herein. It is therefore intended  
30       that the protection granted by Letters Patent hereon be limited only by the definitions contained in the appended claims and equivalents thereof.

## CLAIMS

What is claimed is:

1. A method of forming a lithium ion battery having  
5 reduced flammability, said method comprising the steps  
of:
  - assembling a battery skeleton comprising a carbon  
anode electrode, a cathode electrode, a separator and  
packaging for said battery;
  - 10 forming a solid electrolyte interphase on said  
carbon anode using a first electrolyte;
  - combining a lithium metal salt and an organic  
solvent and mixing with said combination an organic  
cation salt to form an organic cation salt electrolyte,
  - 15 wherein said cation in said salt is selected from the  
group consisting of:



Imidazolium



Pyrazolium



1,2,4-Triazolium



Thiazolium



Oxazolium



1,2,3-Triazolium



Pyridazinium



Pyrimidinium



Pyrazinium



Ammonium



Phosphonium



Pyridinium

wherein  $R_1$ ,  $R_2$ ,  $R_3$ ,  $R_4$ ,  $R_5$ , and  $R_6$  are  
 either H; or F; or separate alkyl groups of  
 from 1 to 15 carbon atoms, respectively; or  
 two of said separate alkyl groups are joined  
 together to constitute a unitary alkylene  
 radical of from 2 to 6 carbon atoms forming a  
 ring structure converging on N; or separate  
 phenyl groups, and

wherein said alkyl groups, said unitary  
 alkylene radical or said phenyl groups are  
 optionally substituted;

replacing said first electrolyte with said organic  
 cation salt electrolyte; and

sealing said battery.

2. A lithium ion battery made by the method of claim 1.

3. The method of claim 1, wherein, in said combining step, said cation in said organic cation salt is



wherein  $R_4$  and  $R_5$  are not equal to H.

4. The method of claim 1, wherein, in said combining step, said organic cation salt is added at a concentration of greater than 0.5 M.

5. The method of claim 1, wherein, in said combining step, said organic cation salt is added at a concentration of greater than 1 M.

15

6. The method of claim 1, wherein, in said combining step, said organic solvent is selected from the group consisting of organic carbonates, gamma-butyrolactone, methyl acetate, ethyl acetate, methyl formate, sulfolane, methylsulfolane, diethyl ether, methyl ethyl ether, tetrahydrofuran, 2-methyltetrahydrofuran, 1,3-dioxolane, nitromethane, acetonitrile, dimethylformamide, dimethylacetamide, dimethylsulfoxide, benzonitrile and combinations thereof.

25

7. The method of claim 1, wherein, in said combining step, said carbonate solvent is selected from the group consisting of ethylene carbonate, propylene carbonate, butylene carbonate, dimethyl carbonate, diethyl carbonate, ethyl methyl carbonate, ethyl propyl

30

carbonate, propyl methyl carbonate, butyl methyl carbonate, vinylene carbonate and combinations thereof.

8. The method of claim 1, further comprising the step  
5 of increasing the viscosity of said organic cation salt electrolyte in said battery with the addition of a binder.

9. The method of claim 1, wherein, in said combining  
10 step, an additive selected from the group consisting of vinylene carbonate, an alkyl phosphonate and an alkyl nitrite, all at a concentration less than 0.5 M, is further included in said mixture.

15 10. An electrolyte having reduced flammability, said electrolyte comprising:

an organic cation salt, wherein said cation in said salt is selected from the group consisting of:



wherein  $R_1$ ,  $R_2$ ,  $R_3$ ,  $R_4$ , and  $R_5$  are not



20 equal to H,  $R_5$   $R_4$  wherein  $R_1$  and  $R_2$  are not



equal to H, and  $R_4$  wherein  $R_1$ ,  $R_2$ ,  $R_3$ , and  $R_4$  are not equal to H;

an organic solvent; and

a metal salt comprising an alkali or alkaline earth  
25 metal cation.

11. An electrolyte having reduced flammability, said electrolyte comprising:

an organic cation salt, wherein said cation in said salt is:



wherein  $R_1$ ,  $R_2$ ,  $R_3$ , and  $R_4$  are not equal to H;

an organic solvent; and

a metal salt comprising an alkali or alkaline earth metal cation.

10

12. The electrolyte of claim 10 or claim 11, wherein said cation in said metal salt is selected from the group consisting of  $Li^+$ ,  $Na^+$ ,  $K^+$ ,  $Mg^{++}$ ,  $Ca^{++}$ ,  $Al^{+++}$  and combinations thereof.

15

13. An electrochemical cell comprising  
an anode;  
a cathode; and  
the electrolyte of claim 10 or claim 11.

20

14. A battery comprising the electrochemical cell of claim 13.

15. The electrolyte of claim 10 or claim 11 wherein  
25 said organic solvent is selected from the group consisting of organic carbonates, gamma-butyrolactone, methyl acetate, ethyl acetate, methyl formate, sulfolane, methylsulfolane, diethyl ether, methyl ethyl ether, tetrahydrofuran, 2-methyltetrahydrofuran, 1,3-  
30 dioxolane, nitromethane, acetonitrile,




dimethylformamide, dimethylacetamide, dimethylsulfoxide, benzonitrile and combinations thereof.

16. The electrolyte of claim 10 or claim 11 wherein  
5 said carbonate solvent is selected from the group consisting of ethylene carbonate, propylene carbonate, butylene carbonate, dimethyl carbonate, diethyl carbonate, ethyl methyl carbonate, ethyl propyl carbonate, propyl methyl carbonate, butyl methyl  
10 carbonate, vinylene carbonate and combinations thereof.

17. An electrolyte having reduced flammability, said electrolyte comprising:

- an organic cation salt at a concentration of  
15 greater than or equal to 0.75 M, wherein said cation in said salt is selected from the group consisting of:

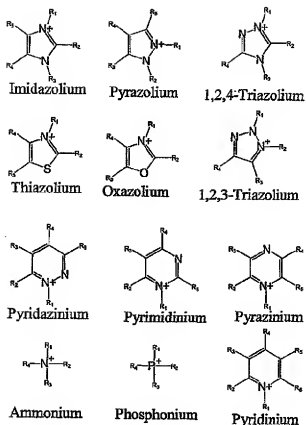

wherein  $R_1$ ,  $R_2$ ,  $R_3$ ,  $R_4$ ,  $R_5$ , and  $R_6$  are  
 either H; or F; or separate alkyl groups of  
 from 1 to 15 carbon atoms, respectively; or  
 two of said separate alkyl groups are joined  
 together to constitute a unitary alkylene  
 radical of from 2 to 6 carbon atoms forming a  
 ring structure converging on N; or separate  
 phenyl groups, and

wherein said alkyl groups, said unitary  
 alkylene radical or said phenyl groups are  
 optionally substituted;


an organic solvent; and

a metal salt comprising an alkali or alkaline earth  
 metal cation.

18. The electrolyte of claim 17 wherein said cation in said metal salt is selected from the group consisting of  $\text{Li}^+$ ,  $\text{Na}^+$ ,  $\text{K}^+$ ,  $\text{Mg}^{++}$ ,  $\text{Ca}^{++}$ ,  $\text{Al}^{+++}$  and combinations thereof.
- 5 19. An electrochemical cell comprising  
an anode;  
a cathode; and  
the electrolyte of claim 17.
- 10 20. A battery comprising the electrochemical cell of claim 19.
21. The electrolyte of claim 17, wherein said organic solvent is selected from the group consisting of organic  
15 carbonates, gamma-butyrolactone, methyl acetate, ethyl acetate, methyl formate, sulfolane, methylsulfolane, diethyl ether, methyl ethyl ether, tetrahydrofuran, 2-methyltetrahydrofuran, 1,3-dioxolane, nitromethane, acetonitrile, dimethylformamide, dimethylacetamide,  
20 dimethylsulfoxide, benzonitrile and combinations thereof.
22. The electrolyte of claim 17 wherein said carbonate  
25 solvent is selected from the group consisting of ethylene carbonate, propylene carbonate, butylene carbonate, dimethyl carbonate, diethyl carbonate, ethyl methyl carbonate, ethyl propyl carbonate, propyl methyl carbonate, butyl methyl carbonate, vinylene carbonate and combinations thereof.
- 30 23. The electrolyte of anyone of claims 10, 11 or 17, wherein the viscosity of said electrolyte is increased with the addition of a binder.

24. The electrolyte of anyone of claims 10, 11 or 17, further comprising an additive selected from the group consisting of vinylene carbonate, an alkyl phosphonate and an alkyl nitrite, having a concentration less than  
5 0.5 M.

25. A gel polymer electrolyte having reduced flammability, said gel polymer electrolyte comprising:  
an organic cation salt, wherein said cation in said  
10 salt is selected from the group consisting of:

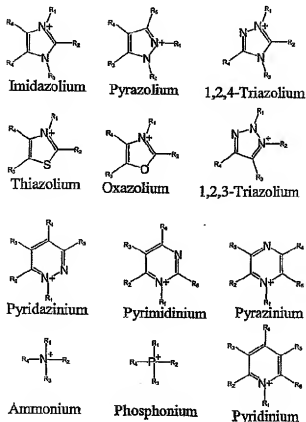

- 15 wherein R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub>, R<sub>4</sub>, R<sub>5</sub>, and R<sub>6</sub> are either H; or F; or separate alkyl groups of from 1 to 15 carbon atoms, respectively; or two of said separate alkyl groups are joined

together to constitute a unitary alkylene radical of from 2 to 6 carbon atoms forming a ring structure converging on N; or separate phenyl groups, and

- 5        wherein said alkyl groups, said unitary alkylene radical or said phenyl groups are optionally substituted;

an organic solvent;

- 10       a metal salt comprising an alkali or alkaline earth metal cation; and

one or more polymers selected from the group consisting of acrylate polymer and fluoropolymer.

26. The gel polymer electrolyte of claim 25, wherein  
15       said acrylate polymer is a methacrylate polymer with at least 1 monomer copolymerizable to methylmethacrylate.

27. The gel polymer electrolyte of claim 25, wherein  
20       said one or more polymers consist of a mixture of two or more polymers.

28. The gel polymer electrolyte of claim 25, wherein said fluoropolymer is poly(vinylene)fluoride.

- 25       29. The gel polymer electrolyte of claim 26, wherein said monomer is selected from the group consisting of styrene-containing monomers, cyano-group-containing monomers, unsaturated carboxylic acids, acid anhydrides, esters, vinyl halides, vinylene halide monomers, vinyl  
30       esters, vinyl ethers and dienes.

30. The gel polymer electrolyte of claim 29, wherein said monomer is selected from the group consisting of

styrene, divinylbenzene, methacrylonitrile, acrylic acid, sodium acrylate, maleic anhydride, methyl methacrylate, ethyl acrylate, propyl acrylate, tetra(ethylene glycol) diacrylate, hydroxyethyl  
5 methacrylate, vinyl chloride, vinyl fluoride, vinyl bromide, vinylene chloride, vinylene fluoride, vinylene bromide, vinyl formate, vinyl acetate, vinyl group-containing acids compounds or their salts, anhydrides or derivatives, methyl vinyl ether, butadiene, isoprene and  
10 chloroprene.

31. The gel polymer electrolyte of claim 25, wherein said solvent is selected from the group consisting of organic carbonates, gamma-butyrolactone, methyl acetate,  
15 ethyl acetate, methyl formate, sulfolane, methylsulfolane, diethyl ether, methyl ethyl ether, tetrahydrofuran, 2-methyltetrahydrofuran, 1,3-dioxolane, nitromethane, acetonitrile, dimethylformamide, dimethylacetamide, dimethylsulfoxide, benzonitrile and  
20 combinations thereof.

32. The gel polymer electrolyte of claim 31, wherein said organic carbonate is selected from the group consisting of ethylene carbonate, propylene carbonate,  
25 butylene carbonate, dimethyl carbonate, diethyl carbonate, ethyl methyl carbonate, ethyl propyl carbonate, propyl methyl carbonate, butyl methyl carbonate, vinylene carbonate and combinations thereof.

30 33. The gel polymer electrolyte of claim 25, wherein said cation in said metal salt is selected from the group consisting of  $\text{Li}^+$ ,  $\text{Na}^+$ ,  $\text{K}^+$ ,  $\text{Mg}^{++}$ ,  $\text{Ca}^{++}$ ,  $\text{Al}^{+++}$  and combinations thereof.

34. The gel polymer electrolyte of claim 25, wherein said anion in said metal salt is selected from the group consisting of  $I^-$ ,  $Br^-$ ,  $SCN^-$ ,  $BF_4^-$ ,  $PF_6^-$ ,  $AsF_6^-$ ,  $CF_3SO_2^-$ ,  
5  $(CF_3SO_2)_2N^-$ ,  $(CF_3CF_2SO_2)_2N^-$ , and  $(CF_3SO_2)_3C^-$ .

35. The gel polymer electrolyte of claim 25 further comprising a saturated or unsaturated cyclic or acyclic organic carbonate or lactone.

10






36. The gel polymer electrolyte of claim 25 further comprising an additive selected from the group consisting of vinylene carbonate, an alkyl phosphonate and an alkyl nitrite, having a concentration less than  
15 0.5 M.

37. The gel polymer electrolyte of claim 25 wherein said organic cation salt is an peralkylated imidazolium cation in combination with various anions.

20

38. A method for the production of a gel polymer electrolyte comprising the steps of:

combining to form a mixture an organic solvent, one or more polymers selected from the group consisting of  
25 acrylate polymers and fluoropolymers, a metal salt comprising an alkali or alkaline earth metal cation, and an organic cation salt, wherein said cation in said salt is selected from the group consisting of:



wherein  $R_1$ ,  $R_2$ ,  $R_3$ ,  $R_4$ ,  $R_5$ , and  $R_6$  are either H; or F; or separate alkyl groups of from 1 to 15 carbon atoms, respectively; or two of said separate alkyl groups are joined together to constitute a unitary alkylene radical of from 2 to 6 carbon atoms forming a ring structure converging on N; or separate phenyl groups, and

wherein said alkyl groups, said unitary alkylene radical or said phenyl groups are optionally substituted; and processing said mixture.


39. The method of claim 38, wherein said processing step is selected from the group consisting of:




- a. heating said mixture at approximately 100°C to yield a homogeneous melt, followed by casting and cooling said melt,
- b. exposing said mixture to UV-light initiated polymerization, said mixture also containing a photoinitiator, and
- c. exposing said mixture to thermal initiated polymerization at approximately 60°C.

10


FIGURE 1




Imidazolium




Pyrazolium




1,2,4-Triazolium




Thiazolium




Oxazolium




1,2,3-Triazolium



Pyridazinium



Pyrimidinium




Pyrazinium



Ammonium



Phosphonium




Pyridinium


SUBSTITUTE SHEET (RULE 26)

FIGURE 2


2/26




I



II



III



IV



V



VI



VII

3/26

FIGURE 3A




FIGURE 3B




FIGURE 3C





FIGURE 3D



4/26

FIGURE 3E




FIGURE 3F




FIGURE 4

5/26


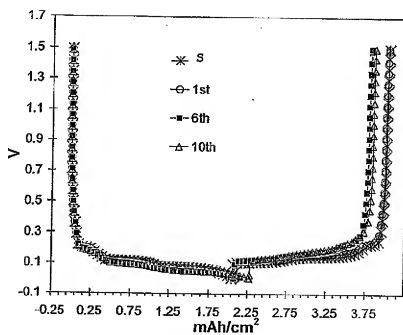



FIGURE 5

6/26

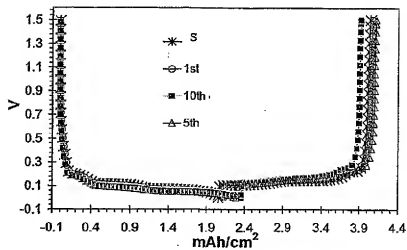

7/26


FIGURE 6

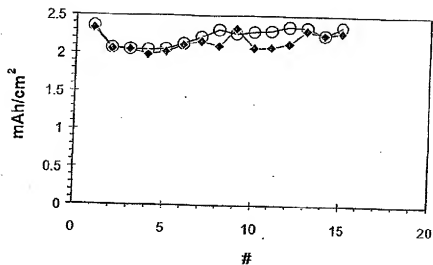




8/26

FIGURE 7

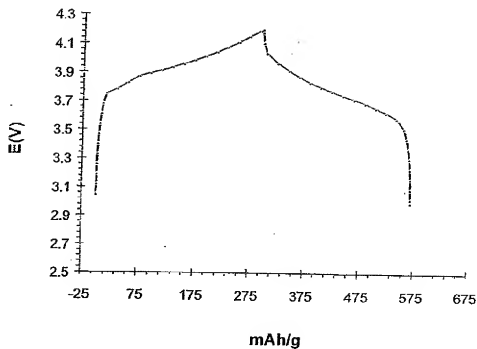


9/26

FIGURE 8

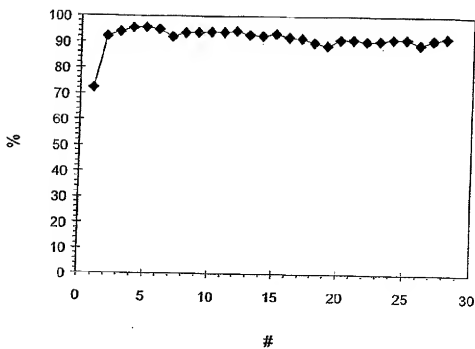

10/26


FIGURE 9

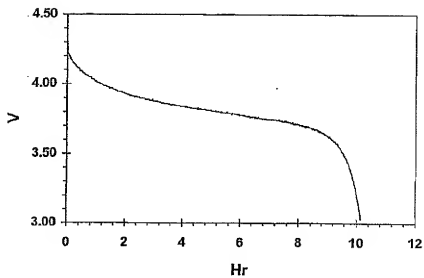

SUBSTITUTE SHEET (RULE 26)

11/26


FIGURE 10

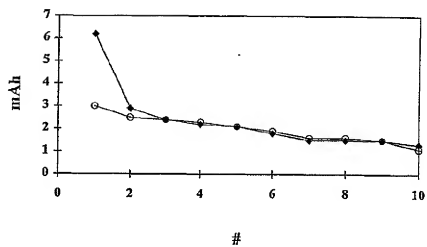

SUBSTITUTE SHEET (RULE 26)


12/26

FIGURE 11

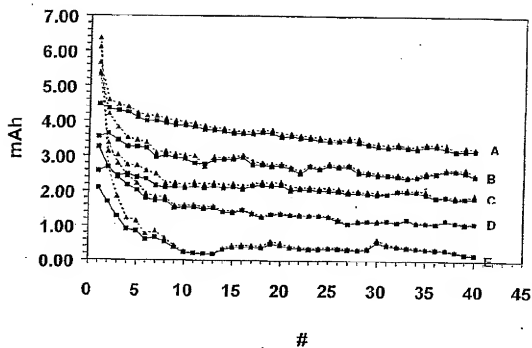

13/26


FIGURE 12

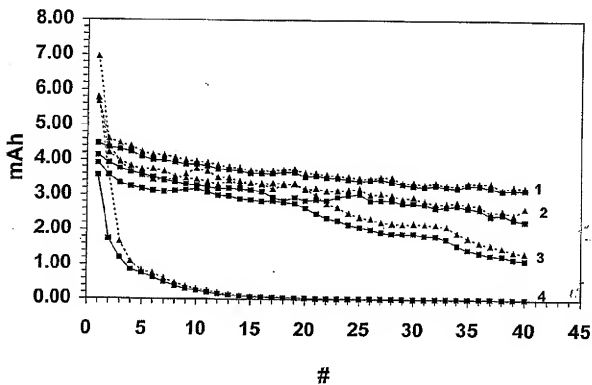

SUBSTITUTE SHEET (RULE 26)

14/26


FIGURE 13

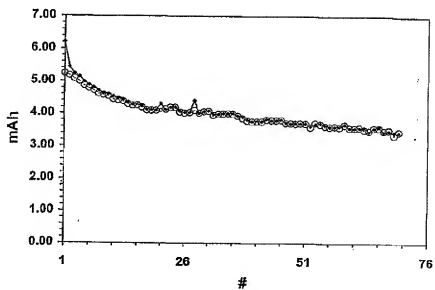

SUBSTITUTE SHEET (RULE 26)

15/26


FIGURE 14

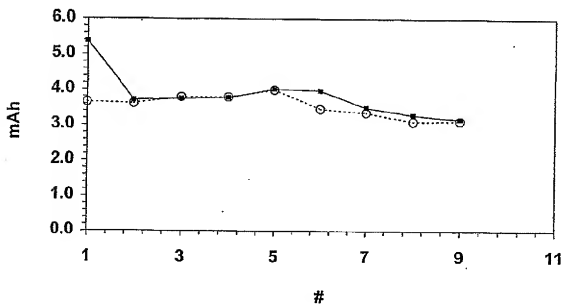



16/26


FIGURE 15

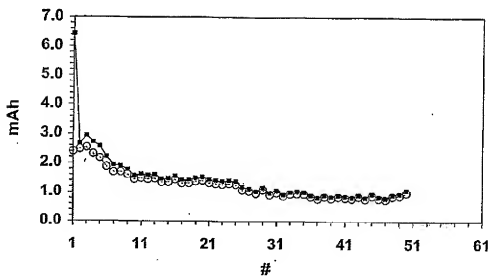

SUBSTITUTE SHEET (RULE 26)

17/26


FIGURE 16

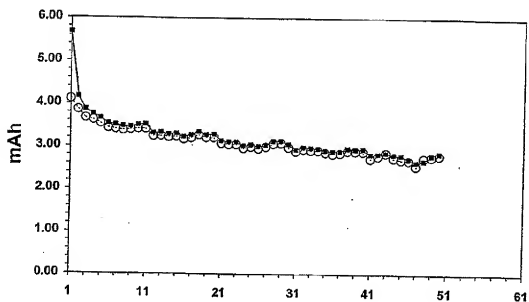


SUBSTITUTE SHEET (RULE 26)

18/26



FIGURE 17

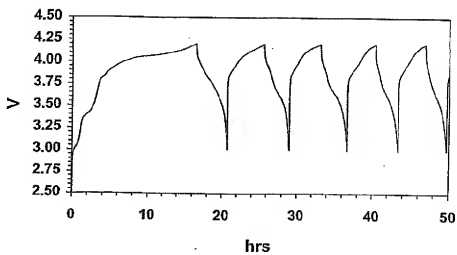

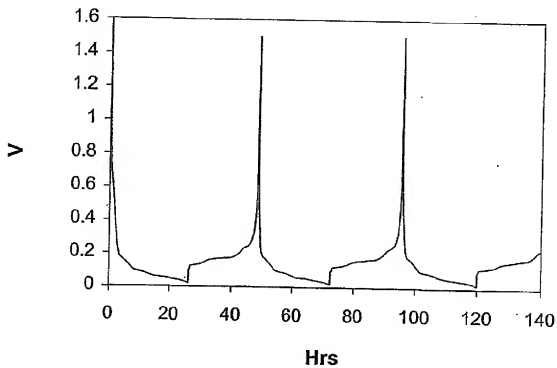19/26  
FIGURE 18

20/26

FIGURE 19

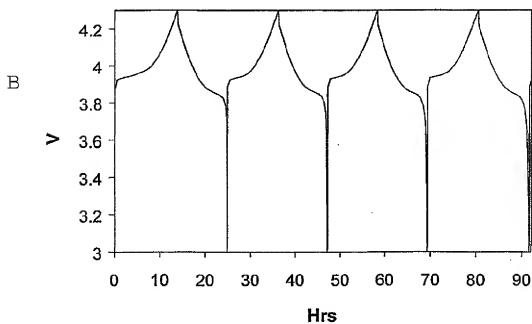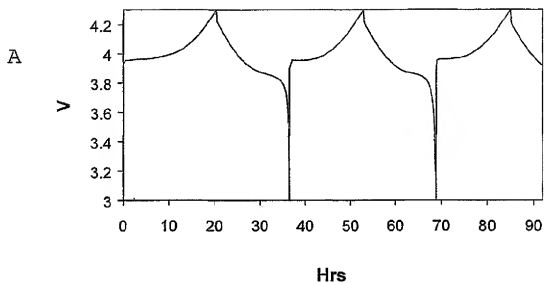

21/26

FIGURE 20



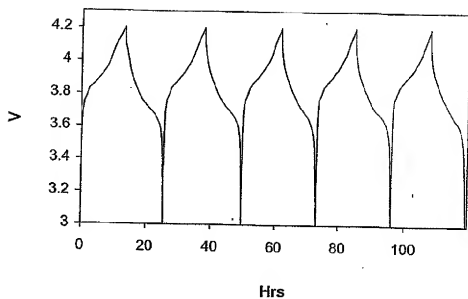


FIGURE 21

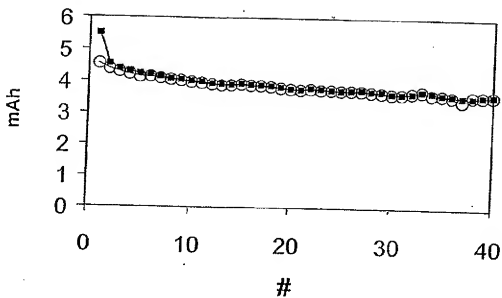

23/26


FIGURE 22

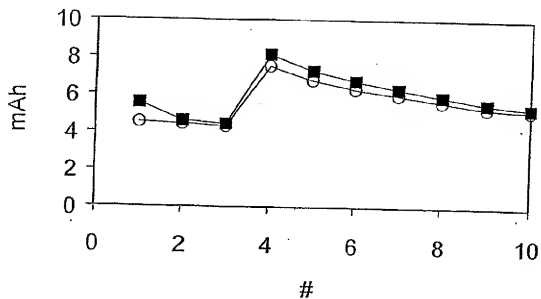




24/26

FIGURE 23

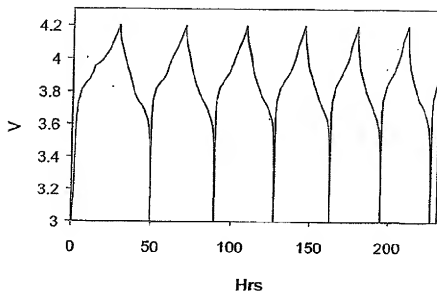

25/26


FIGURE 24

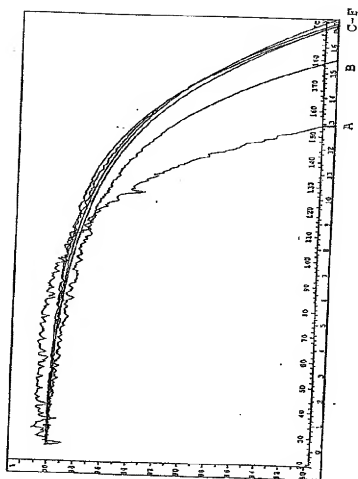

SUBSTITUTE SHEET (RULE 26)

26/26

FIGURE 25

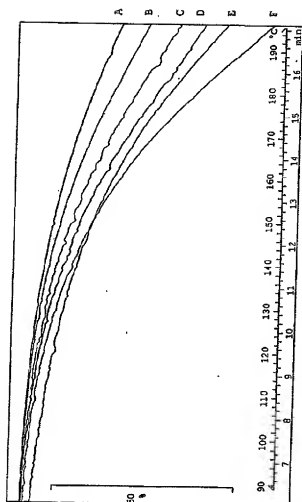



(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 December 2001 (06.12.2001)

PCT

(10) International Publication Number  
WO 01/093363 A3

- (51) International Patent Classification: H01M 10/40, H01G 9/02, H01B 1/12 (81) Designated State (national): JP.
- (21) International Application Number: PCT/US01/17174 (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (22) International Filing Date: 25 May 2001 (25.05.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/207,613 26 May 2000 (26.05.2000) US
- (71) Applicant: COVALENT ASSOCIATES, INC. [US/US]; Ten State Street, Woburn, MA 01801 (US).
- (72) Inventors: MCEWEN, Alan, B.; 20 Upham Terrace, Melrose, MA 02176 (US). KOCH, Victor, R.; 5 Fridolin Hill, Lincoln, MA 01773 (US).
- (74) Agents: HEINE, Holliday, C. et al.; Weingarten, Schurgen, Gagnebin & Hayes, LLP, Ten Post Office Square, Boston, MA 02109 (US).
- Declarations under Rule 4.17:  
— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations  
— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- Published:  
— with international search report
- (88) Date of publication of the international search report: 9 January 2003
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 01/093363 A3

(54) Title: NON-FLAMMABLE ELECTROLYTES

(57) Abstract: Improved electrolytes for application in electrical storage devices, such as batteries and capacitors, electrochromic display and other applications requiring ionically conductive median are disclosed. The electrolytes of the invention contain organic cation salts, also called ionic liquids or molten salts. These improved electrolytes have useful characteristics such as high thermal stability and reduced flammability.

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/17174

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01M10/40 H01G9/02 H01B1/12

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01M H01G H01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data, INSPEC, COMPENDEX, CHEM ABS Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 02252 A (COVALENT ASSOCIATES INC) 23 January 1997 (1997-01-23) page 1, line 10 - line 12 page 2, line 12 - page 5, line 11 page 6, line 28 - page 7, line 9 page 7, line 10 - line 27 examples 5-7 ---	1-3,6,7, 10,12-16
P,X	WO 01 04997 A (COVALENT ASSOCIATES INC) 18 January 2001 (2001-01-18) page 1, line 16 - line 22 page 5, line 29 - page 8, line 20 page 9, line 22 - line 29 examples 2,3,5 --- -/-	1-3,6,7, 10,12-16

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document relating to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

1 July 2002

Date of mailing of the international search report

19.09.02

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2200 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 881 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Gamez, A

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/17174

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 11619 A (SECR DEFENCE BRIT ;GREEN KEVIN JOHN (GB); WILSON JAMES CHARLES (GB) 19 March 1998 (1998-03-19) page 1, line 17 - line 20 page 2, line 1 -page 3, line 11 examples 1-3 ---	1,25,28, 31-34, 37-39
X	FULLER J ET AL: "IONIC LIQUID-POLYMER GEL COMPOSITE ELECTROLYTES" MOLTEN SALT FORUM, TRANSD TECH PUBLICATIONS, AEDERMANNSDORF, CH, vol. 5/6, 1998, pages 605-608, XP001006302 ISSN: 1021-6138 the whole document ---	1,25,28, 31-34, 37-39
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 02, 29 February 2000 (2000-02-29) -& JP 11 329495 A (SANYO CHEM IND LTD), 30 November 1999 (1999-11-30) abstract ---	1-7,10, 12-22
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 02, 29 February 2000 (2000-02-29) -& JP 11 307121 A (MITSUBISHI CHEMICAL CORP), 5 November 1999 (1999-11-05) abstract ---	1-7,10, 12-22
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 06, 22 September 2000 (2000-09-22) & JP 2000 082494 A (SANYO CHEM IND LTD), 21 March 2000 (2000-03-21) abstract ---	25,38
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 02, 29 February 2000 (2000-02-29) -& JP 11 306859 A (TDK CORP), 5 November 1999 (1999-11-05) abstract ---	25,38
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 01, 31 January 2000 (2000-01-31) -& JP 11 273734 A (SANYO CHEM IND LTD), 8 October 1999 (1999-10-08) abstract ---	1-7, 12-22
	---	

-/--

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 01/17174

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>PATENT ABSTRACTS OF JAPAN vol. 2000, no. 01, 31 January 2000 (2000-01-31) - &amp; JP 11 273733 A (SANYO CHEM IND LTD), 8 October 1999 (1999-10-08) abstract -----</p>	<p>1,7, 12-22</p>

Form PCT/ISA/210 (continuation of second sheet) (July 1992)



# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 01/17174

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: -see annex  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:  
see FURTHER INFORMATION sheet PCT/ISA/210
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:  
1-10(partially), 12-39(partially)

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.  
☐ No protest accompanied the payment of additional search fees.

## FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-10(partially),12-39 (partially)

A method of forming a battery having reduced flammability, said method comprising the steps of :  
 assembling a battery skeleton comprising a carbon anode electrode, a cathode electrode, a separator and packaging for said battery;  
 forming a solid electrolyte interphase on said carbon anode using a first electrolyte;

combining an alkali or alkaline earth metal salt and an organic solvent and mixing with said combination an organic cation salt to form an organic cation salt electrolyte, wherein said cation in said salt being a heterocyclic stabilized organic cation selected from imidazolium, pyrazolium, triazolium, thiazolium, oxazolium, pyridazinium, pyrimidinium, pyrazinium, and pyridinium, with different substituents R1 to R6 wherein R1, R2, R3, R4, R5 and R6 are either H or not, or F or separate alkyl groups of from 1 to 15 carbon atoms, respectively; or two of said separate alkyl groups are joined together to constitute an unitary alkylene radical of from 2 to 6 carbon atoms forming a ring structure converging on N; or separate phenyl groups, and wherein said alkyl groups, said unitary alkylene radical or said phenyl groups are optionally substituted;

replacing said first electrolyte with said first organic cation salt electrolyte; and  
 sealing said battery.

The electrolyte comprising the organic cation salt defined above, an organic solvent and an alkali or alkaline earth metal salt; a gel polymer electrolyte and its method of production, comprising the organic cation salt defined above, an organic solvent, an alkali or alkaline earth metal salt and one or more polymers selected from acrylate polymer or fluoropolymer; the battery or the electrochemical cell comprising this electrolyte, are also claimed.

2. Claims: 1-10(partially),12-39 (partially)

A method of forming a battery having reduced flammability, said method comprising the steps of :  
 assembling a battery skeleton comprising a carbon anode electrode, a cathode electrode, a separator and packaging for said battery;  
 forming a solid electrolyte interphase on said carbon anode using a first electrolyte;

combining an alkali or alkaline earth metal salt and an organic solvent and mixing with said combination an organic cation salt to form an organic cation salt electrolyte, wherein said cation in said salt being an ammonium R1R2R3R4N+ wherein R1, R2, R3, and R4 are either H or not, or F or separate alkyl groups of from 1 to 15 carbon atoms,

## FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

respectively; or two of said separate alkyl groups are joined together to constitute an unitary alkylene radical of from 2 to 6 carbon atoms forming a ring structure converging on N; or separate phenyl groups, and wherein said alkyl groups, said unitary alkylene radical or said phenyl groups are optionally substituted;

replacing said first electrolyte with said first organic cation salt electrolyte; and  
sealing said battery.

The electrolyte comprising the organic cation salt defined above, an organic solvent and an alkali or alkaline earth metal salt; a gel polymer electrolyte and its method of production, comprising the organic cation salt defined above, an organic solvent, an alkali or alkaline earth metal salt and one or more polymers selected from acrylate polymer or fluoropolymer; the battery or the electrochemical cell comprising this electrolyte, are also claimed.

## 3. Claims: 1-9(partially),11,12-39 (partially)

A method of forming a battery having reduced flammability, said method comprising the steps of :

assembling a battery skeleton comprising a carbon anode electrode, a cathode electrode, a separator and packaging for said battery;

forming a solid electrolyte interphase on said carbon anode using a first electrolyte;

combining an alkali or alkaline earth metal salt and an organic solvent and mixing with said combination an organic cation salt to form an organic cation salt electrolyte, wherein said cation in said salt being a phosphonium  $R_1R_2R_3R_4P^+$  wherein  $R_1$ ,  $R_2$ ,  $R_3$ , and  $R_4$  are either H or not, or F or separate alkyl groups of from 1 to 15 carbon atoms, respectively; or two of said separate alkyl groups are joined together to constitute an unitary alkylene radical of from 2 to 6 carbon atoms forming a ring structure converging on N; or separate phenyl groups, and wherein said alkyl groups, said unitary alkylene radical or said phenyl groups are optionally substituted;

replacing said first electrolyte with said first organic cation salt electrolyte; and  
sealing said battery.

The electrolyte comprising the organic cation salt defined above, an organic solvent and an alkali or alkaline earth metal salt; a gel polymer electrolyte and its method of production, comprising the organic cation salt defined above, an organic solvent, an alkali or alkaline earth metal salt and one or more polymers selected from acrylate polymer or fluoropolymer; the battery or the electrochemical cell comprising this electrolyte, are also claimed.

## FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box 1.2

Claims Nos.: -see annex

Present claims 1, 10, 17, 25 and 38 relate to an extremely large number of possible compounds (organic cation salts). Support within the meaning of Article 6 PCT and/or disclosure within the meaning of Article 5 PCT is to be found, however, for only a very small proportion of the compounds claimed. In the present case, the claims so lack support, and the application so lacks disclosure, that a meaningful search over the whole of the claimed scope is impossible. Consequently, the search has been carried out for those parts of the claims which appear to be supported and disclosed, namely those parts relating to the heterocyclic stabilized organic cations selected from the group imidazolium, pyrazolium, triazolium, thiazolium, oxazolium, pyridazinium, pyridinium, pyrazinium and pyridinium with substitutions or not. The examples related to this group have been searched.

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/17174

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9702252	A	23-01-1997	EP 0839139 A1 JP 2001517205 T WO 9702252 A1 US 5827602 A	06-05-1998 02-10-2001 23-01-1997 27-10-1998
WO 0104097	A	18-01-2001	FR 2798383 A1 GB 2353997 A WO 0104097 A2	16-03-2001 14-03-2001 18-01-2001
WO 9811619	A	19-03-1998	EP 0925615 A1 WO 9811619 A1 US 6245847 B1	30-06-1999 19-03-1998 12-06-2001
JP 11329495	A	30-11-1999	JP 3060107 B2	10-07-2000
JP 11307121	A	05-11-1999	NONE	
JP 2000082494	A	21-03-2000	NONE	
JP 11306859 4	A		NONE	
JP 11273734 4	A		NONE	
JP 11273733 4	A		NONE	

